

# Lyric Deco

# THORN

96642774 LYRIC DECO LED1050-830 HF MFS OP

|                       |      |   |   |   |   |
|-----------------------|------|---|---|---|---|
| LED 18W LED_LYRD_1050 | IP20 |  |  |  |  |
|-----------------------|------|---|---|---|---|


## Lyric Deco

A stylish, curving tubular free-standing LED luminaire with fixed output control gear. Class I electrical, IP20. Diffuser: opal glass. Complete with 3000K LED.


Dimensions: Ø200 x 300 mm  
Luminaire input power: 18 W  
Luminaire luminous flux: 1050 lm  
Luminaire efficacy: 58 lm/W  
Weight: 4.2 kg



TLG\_LYRD\_F\_FLOORPDB.jpg

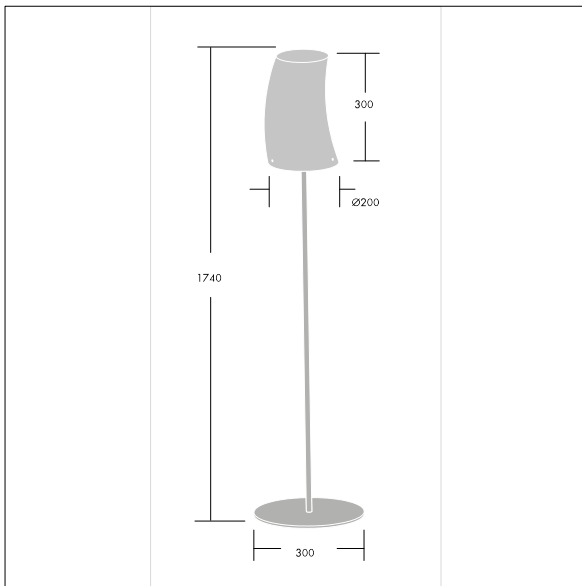

TLG\_LYRD\_M\_T.wmf

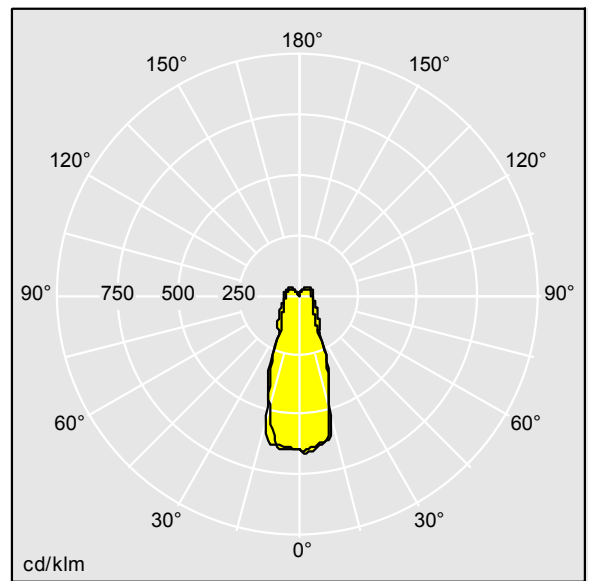

TLTP\_LYRD\_SUSP.idt

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 1050 lm  
Luminaire efficacy\*: 58 lm/W  
Lamp efficacy: 58 lm/W  
Colour Rendering Index min.: 80  
LOR: 1,00 ULOR: 0,26 DLOR: 0,74

Correlated colour temperature: 3000 Kelvin  
Chromaticity tolerance (initial MacAdam): 3  
Rated median useful life\*:  
L70 50000h at 25°C  
Ballast: 1x HF\_  
Luminaire input power\*: 18 W  
Dimming: FO

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting